



Balance basique

# PR-IID




► PR-IID(LED)

## Balance d'autocontrôle

As a simple weighing scale with max. 1/30,000 resolution, PR-IID/DU is suitable for various industrial environment, including market & shop with a low-profile design.



Low Profile Design

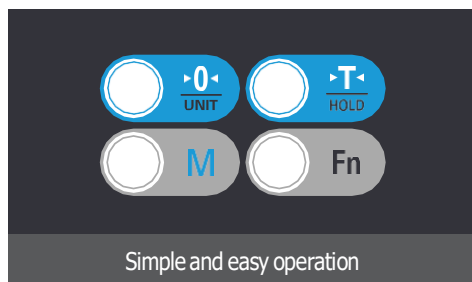

Simple and easy operation



High-visibility display



<b>Modèle</b>	<b>PRII-D</b>		
<b>Capacité Maximale</b>	3/6kg	6/15kg	15/30kg
<b>Echelon</b>	1/2g	2/5g	5/10g
<b>Affichage</b>	LED : 7 segments		
<b>Température d'utilisation</b>	Entre -10° et 40°		
<b>Alimentation</b>	Batterie rechargeable PB 4V, 6VDC Adaptateur		
<b>Dimensions du plateau (mm)</b>	330 x 235 mm		
<b>Poids du produit</b>	3,3kg		



CAS BLDG., 1315, YANGJAE-DAERO  
 GANGDONG-GU, SEOUL, KOREA  
 TEL\_82 2 2225 3500 / FAX\_82 2 475 4668

CAS Global homepage [www.globalcas.com](http://www.globalcas.com)



Specifications are subject to change without notice improvement.

**CAS**